



Spectrum Brands, Inc.
 3001 Deming Way
 Middleton, WI 53562
 800-331-4522
www.rayovac.com

Marketing Data Sheet- Fusion 9-Volt



Rayovac Stock Number: A1604FUS

Name: 9-Volt Fusion Alkaline battery

Engineering Parameters

Cell Chemistry Alkaline

Designation

ANSI/NEDA – 1604A , IEC – 6LR61

Nominal Voltage

9 Volts

Approximate Weight

1.6 Oz (45.4 grams)

Approximate Volume

1.2 CU IN (19.7 CU CM)

Operating Temp. Range

-30° C to 55° C (-20° F to 130° F)

Terminals: Snap

Jacket: Steel

Environmental:



Meets Environmental Protection Agency (EPA)

Requirements For Landfill Disposal.

No Mercury Added Formulation

Meets EU Battery Directive 2006/66/EC

For Safety Data sheets, visit: www.rayovac.com/Contact/safety-data-sheets.aspx

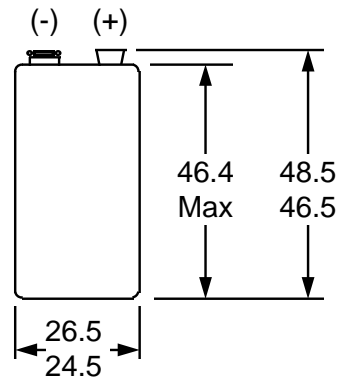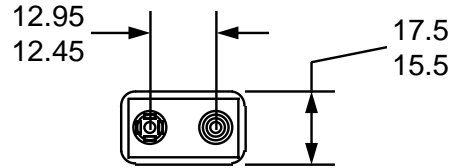

Typical Initial Service Life (ANSI C18.1 Tests)

Application and Duty Cycle	Discharge Load	Midpoint Current (mA @ 7.2V)	Cut-off Voltage	Service	Units	Discharge Capacity (mAh)
Radio, Light drain 4 min/15 min, 8hr/day	620 Ω	12	5.4	54	hours	650
Toy/Game 4 min/hr, 8hr/day	270 Ω	27	5.4	24	hours	650
Smoke Detector 1 sec/hr	620 Ω 10kΩ background	12 (pulse)	7.5	550	hours	450