



North American Headquarters  
 601 Rayovac Drive  
 Madison, WI 53711  
 Telephone 1-800-331-4522  
 Internet [www.rayovac.com](http://www.rayovac.com)


## Marketing Data Sheet - Batteries

S6600507  
 Issue A  
 Memo No:


Rayovac Stock Number: PL713

Name: PL713 D Platinum NiMH, R2U Grade (3000)

### Dimensions:

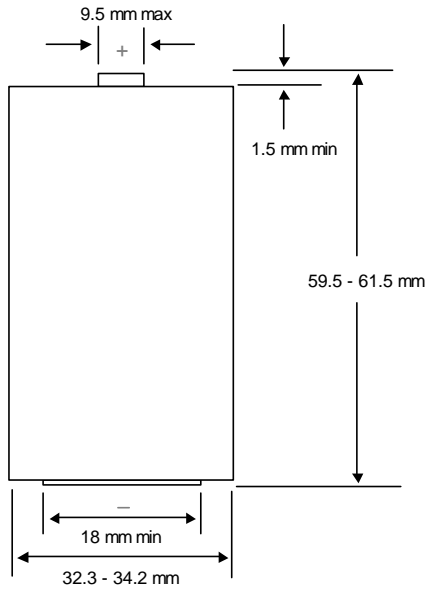


### Discharge Curve Profiles:

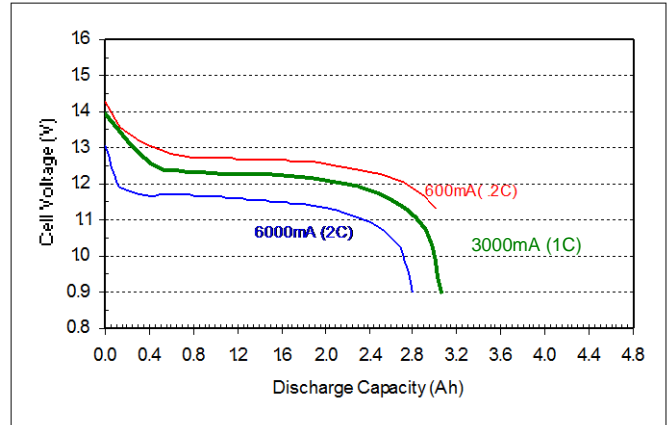

### Specifications:

Cell Type: Nickel Metal Hydride		Size: D - PL713
Size Designation	ANSI C18.2	1.2H4
	IEC 61951-2	HR20
Physical Attributes	Weight	73 g
	Size	32.3 (D) x 60.7 (H) mm
	Volume	50.47 cc
Discharge Capacity	Typical	3000 mAh
	Minimum	2790 mAh
External Insulating Cell Jacket		Polyvinylchloride (PVC)
Nominal Voltage for 400mA (0.2I <sub>A</sub> ) load		1.24 V
Energy Content	Energy Density	71 Wh/l
	Specific Energy	50 Wh/kg
Charge Temperature Range	Standard	0° to 45°C
	Rapid	0° to 45°C
	Maintenance	0° to 45°C
Discharge Temperature Range		-10° to 60°C
Storage Temperature Range	<3 Months	-20° to 50°C
	3-9 Months	-20° to 40°C
	3-12 Months	-20° to 30°C
Cycle Life Expectancy		More than 200 Cycles
Meets EPA requirements for landfill, no mercury added formulation		

### Charge Curve Profiles:

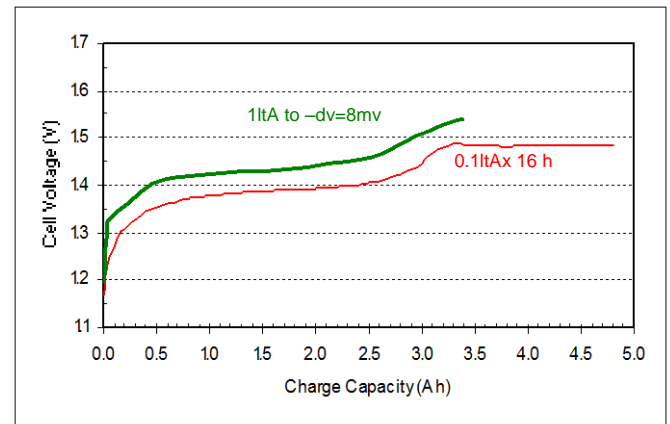

### Discharge Capacity Profile (Crg:Dis)

