



Spectrum Brands, Inc.
3001 Deming Way
Middleton, WI 53562
Telephone 1-800-331-4522
Internet www.rayovac.com

Marketing Data Sheet



Rayovac Stock Number: **813FUS**

Name: **813 D Fusion Alkaline Battery**

Engineering Parameters

Cell Chemistry

Alkaline Manganese Dioxide

Designation

ANSI/NEDA – 13A (AA), IEC – LR20

Nominal Voltage

1.5 volts

Approximate Weight

5.0 Oz (144 grams)

Approximate Volume

3.4 CU IN (56 cc)

Operating Temp. Range

-30° C to 55° C (-20° F to 130° F)

Terminals: Flashlight

Shell: Plastic Film

Environmental:

Meets Environmental Protection Agency (EPA)


Requirements For Landfill Disposal.

No Mercury Added Formulation

Meets EU Battery Directive 2006/66/EC

For Safety Data sheets, visit:

www.rayovac.com/Contact/safety-data-sheets.aspx

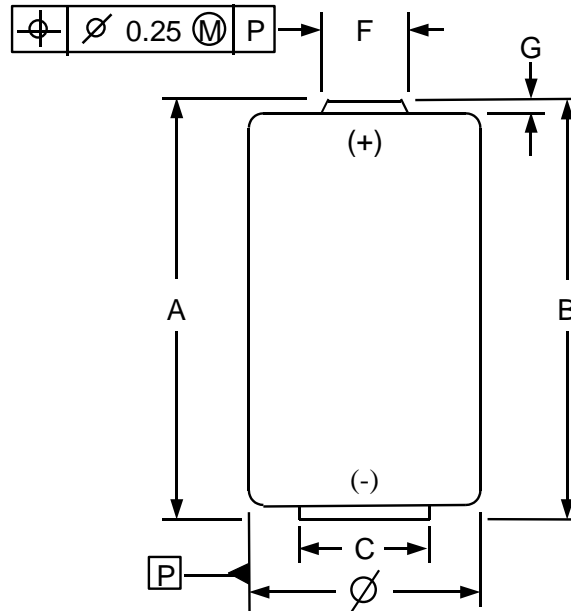

Dimensions	Millimeters	Inches
A (Max)	61.5	2.421
B (Min)	59.5	2.343
C (Min)	18.0	0.709
E (Max)	1.0	0.039
F (Max)	9.5	0.374
G (Min)	1.5	0.059
Ø (Max)	34.2	1.346
Ø (Min)	32.3	1.272

Service life guidelines and are shown on the following page.

Typical Initial Service Life

Application and Duty Cycle	Discharge Load	Midpoint Current (mA @ 1.2V)	Cut-off Voltage	Service	Units	Discharge Capacity (mAh)
Lighting 4 min/15 min, 8hr/day	1.5 Ω	764	0.9	16	hours	12220
Lighting 4 min/hr, 8hr/day	2.2 Ω	545	0.9	26	hours	14170
Toy 1 hr/day	2.2 Ω	530	0.8	25	hours	13250
Portable Stereo 2 hrs/day	600 mA	600	0.9	19	hours	11400
Radio 4 hrs/day	10 Ω	126	0.9	128	hours	16130